




Trinity6 Tweeter Impedence (Magnify)

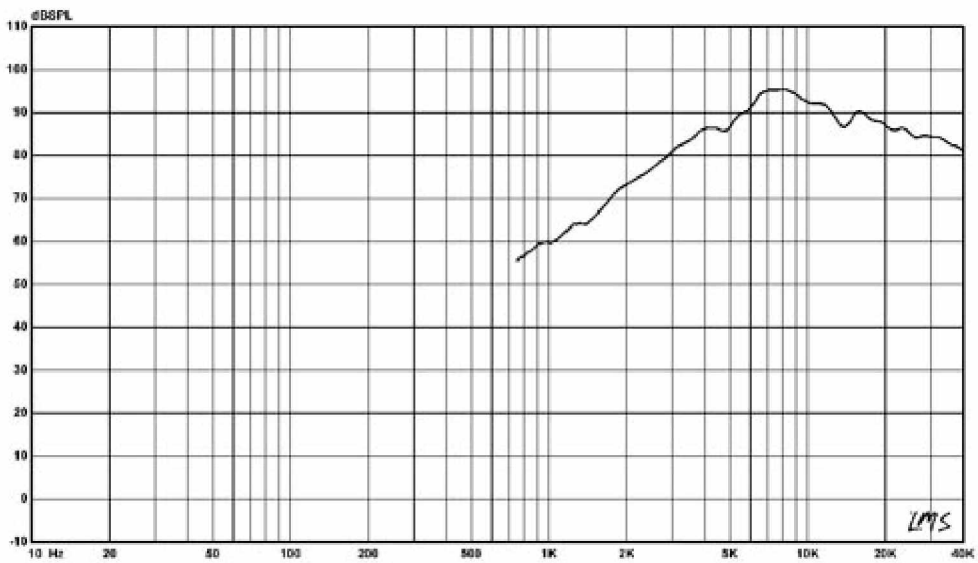


Trinity6 Tweeter Frequency Response

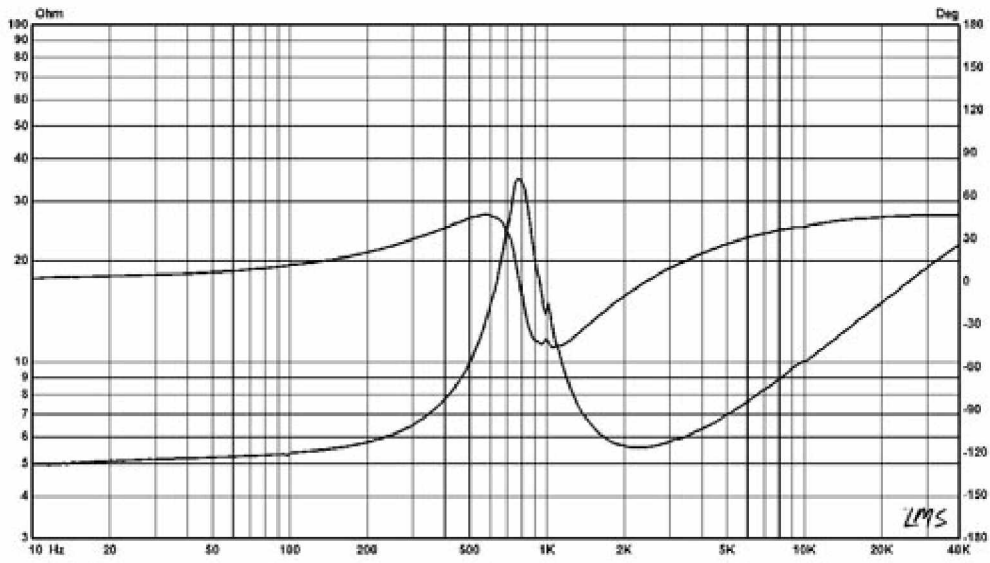


Trinity6 MidRange Impedence

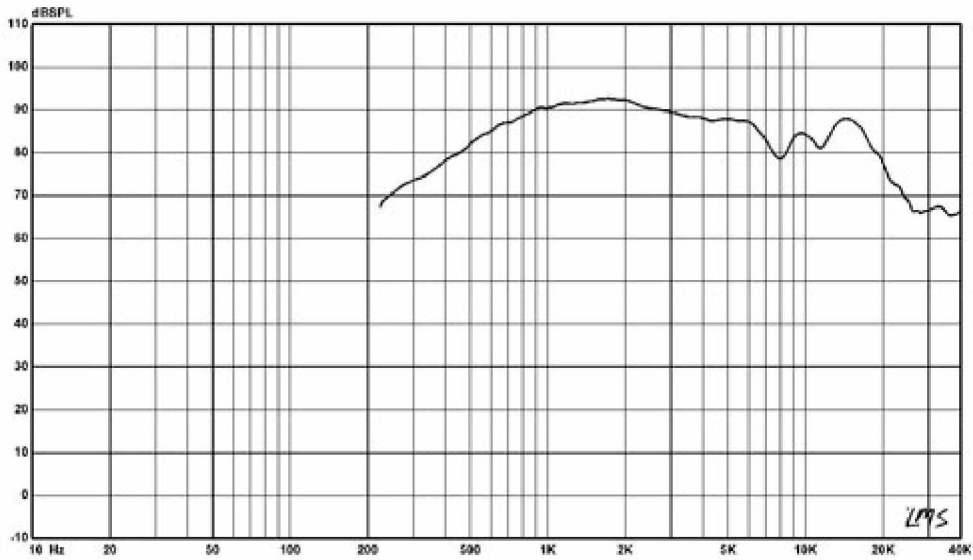

Trinity6 MidRange Frequency Response

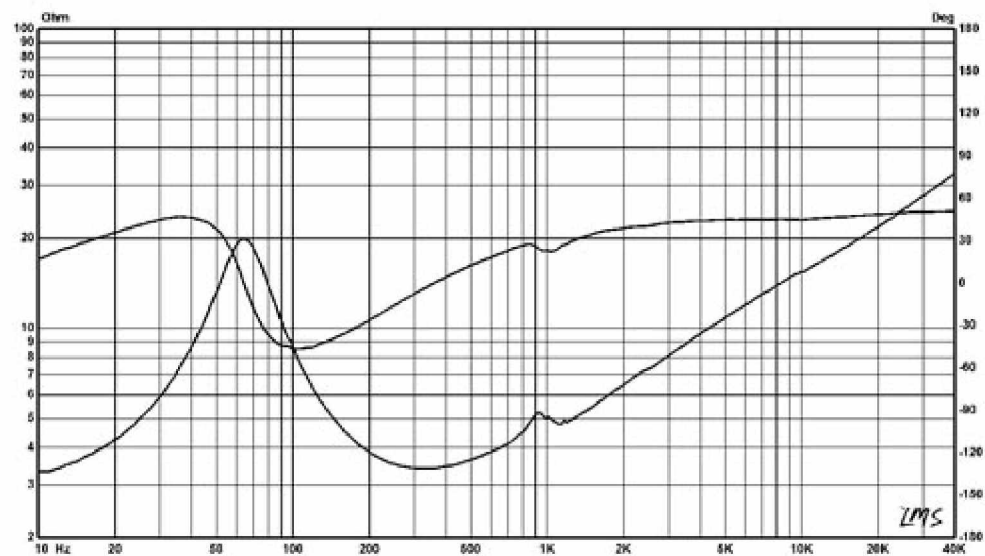

Trinity6 Woofer Impedence

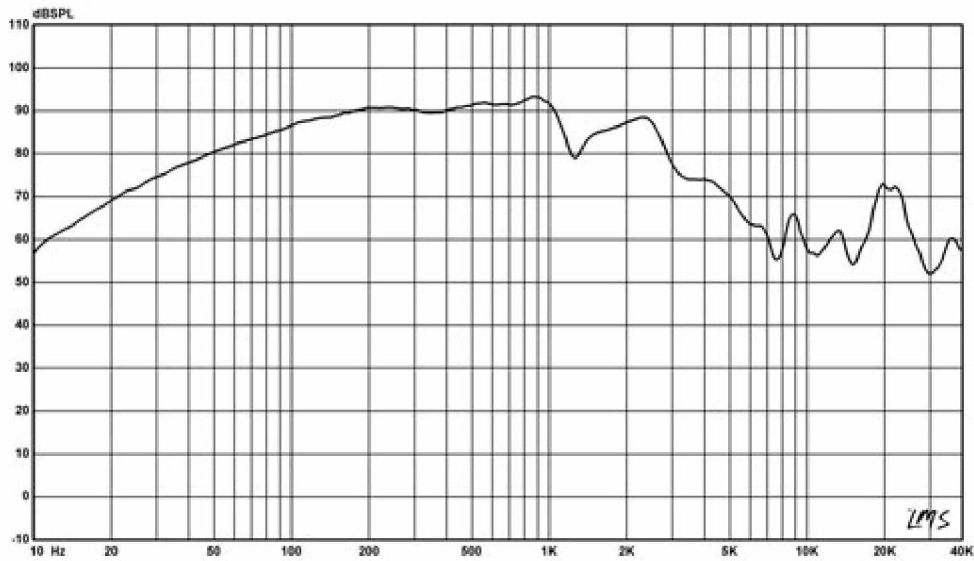

Trinity6 Woofer Frequency Response



<b>Trinity6 3-Way Ribbon Coaxial Full-Frequency</b>	
<b>Tweeter</b>	
Nominal Impedance (Z)(O) :	6
Nominal Power Handling (Pnom)(W) :	5
Sensitivity (2.83v/1m)(dB) :	90
<b>Midrange</b>	
Nominal Impedance (Z)(O) :	6
Resonance Frequency (Fs)(Hz) :	770
Nominal Power Handling (Pnom)(W) :	10
Sensitivity (2.83v/1m)(dB) :	90dB
<b>Woofer</b>	
Nominal Impedance (Z)(O) :	4
Resonance Frequency (Fs)(Hz) :	63
Nominal Power Handling (Pnom)(W) :	40
Sensitivity (2.83v/1m)(dB) :	90dB
VC Diameter (mm) :	76
DC Resistance(O) :	3.2
Linear Excursion (Xmax)(mm) :	2.7
Suspension Compliance (Cms)(uM/N) :	240.9
Mechanical Q (Qms) :	2.50
Electrical Q (Qes) :	0.46

Total Q (Qts) :	0.38
Moving Mass (Mms)(g) :	31.9
Equivalent Air Volume (Vas)(L) :	5.2
Recommended Box Size	
Cabinet Type :	Vented
Recommended Box Volume(Vb)(L) :	10
Tuning Frequency(Fb)(Hz) :	60
-3dB Cut-Off Frequency(F3)(Hz) :	55
Weight (M)(Kg) :	1.5