


15" PROFESSIONAL

- HIGH POWER LOADING DESIGN
- PAPER CONE WITH FABRIC SURROUND (LIGHT WEIGHT & HIGH STIFFNESS)
- DIE CAST BASKET
- CCAW WITH ALUMINUM BOBBIN
- VOICE COIL COOLING DESIGN

DIAPHRAGM MTL	Air Dry Paper
SURROUND MTL	Fabric
NOMINAL IMPEDANCE	8 W
DCR IMPEDANCE	6 W
SENSITIVITY 1W/1m	97 dB
FREQUENCY RESPONSE	45-3.5K Hz
FREE AIR RESONANCE	45 Hz
VOICE COIL DIAMETER	75 mm
AIR GAP HEIGHT	10 mm
RATED POWER INPUT	500 W
MAXIMUM POWER INPUT	1000 W
FORCE FACTOR, BL	22.4 TM
MAGNET WEIGHT (69oz)	1939 g
MOVING MASS	104 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	123.3MN <sup>-1</sup>
EFFEC.PISTON AREA	0.09 M <sup>2</sup>
Levc	1.5414 mH
Zo	33.8542 ohm
X-max	3 mm
Vas	141.83 Litr.
Qts	0.28
Qms	1.60
Qes	0.35

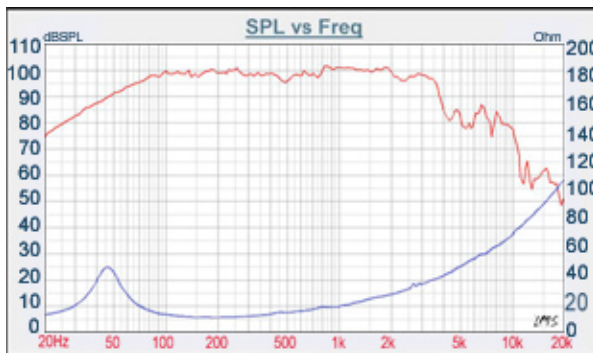

P.O. BOX 10-53 NEI HU, TAIPEI, TAIWAN  
VOICE 886.2.26570282 FAX 886.2.26580168